

EON718S

Powered 18-inch PA Subwoofer



SPEC SHEET



OVERVIEW ■

The **JBL EON718S** 18-inch powered subwoofer, part of JBL's new EON700 Series of powered loudspeakers, brings advanced DSP and control to portable PA systems for live sound and installed applications, with class-leading volume and clarity and comprehensive features that make setup and operation a breeze.



REAR PANEL CONNECTIONS

PRODUCT HIGHLIGHTS ■

- 18-inch woofer
- **Power:** 1,500W Peak / 750W RMS
- **Frequency response:** 31Hz - 150Hz (-10)
40Hz - 120Hz (-3)
- **Max SPL:** 131 dB
- **Audio I/Os:** 2 XLR Combo, 2 XLR loop-thru
- **Advanced dbx DSP:** Parametric EQ, polarity inversion, speaker delay
- Built-in 2-channel digital mixer
- Color backlit LCD screen provides easy access to functions
- Universal JBL Pro Connect app control
- Durable birch plywood cabinet with duraflex paint and metal grille
- Two ergonomic handles simplify transport
- Built-in threaded pole mount.
- Built to stack for storage and use in cardioid mode.
- **Net Weight:** 37 kg (81.6 lbs.)
- **Shipping Weight:** 42.8 kg (94.4 lbs.)

EON718S

Powered 18-inch PA Subwoofer



SPEC SHEET

SPECIFICATIONS ■

System Type	18IN Powered Subwoofer	Cooling	Passive
Woofers Model	718G	LED Indicators	1 Power LED, 1 System Limit, 1 Front LED
Woofers Size	18"	Input Impedance	50k/100k un-balanced/balanced
Woofers Magnet	Ferrite	Input Gain	-∞ to +36db
Woofers Voice Coil	3"	I/O	2 XLR Combo 2 XLR M Thru
Transducer Impedance	4 ohm rated	Cabinet	18mm Duraflex-coated Birch Plywood
Max SPL	131dB @1m/2Pi	Grille	16GA perforated steel with acoustically transparent black cloth backing
Freq Range -10	31Hz - 150Hz	Suspension/Mount	1 M20 Threaded Polecup
Freq Range -3	40Hz -120Hz	Handles	2
Hor Dispersion	Omni	Net Weight	35.5kg (78.26 in.)
Vert Dispersion	Omni	Gross Weight	42.5kg (93.70 in.)
Crossover Frequency	80, 100, 120Hz selectable	Product Dims	HxWxD 674x609x637mm (26.54x23.98x25.08 in.)
Power Rating	1500W / 750W RMS	Shipping Dims	HxWxD 722x743x713mm (28.43x29.25x28.07 in.)
AC Power Input	100V-120V or 220V-240V		


EON718S

Powered 18-inch PA Subwoofer



SPEC SHEET

FREQUENCY RESPONSE ■

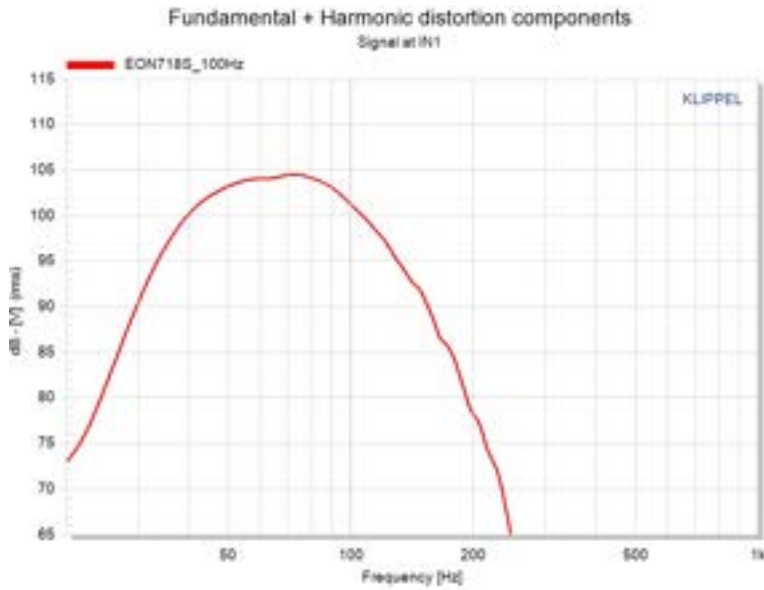

PRODUCT DIMENSIONS ■

